




BATTERY

PARTS
MANUAL

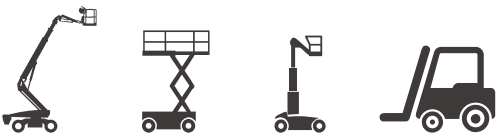

AGM BATTERY				
Model	Rated voltage	Capacity	Dimensions (mm)	Weight
 3-EV-170	6V	170Ah	261×181×245	24kg
 3-EV-200	6V	200Ah	261×180×270	35kg
 3-EV-260	6V	260Ah	356×180×270	46kg
 6-EV-80	12V	80Ah	261×168×212	36.5kg
 6-EV-100	12V	100Ah	330×172×215	35kg
 6-EV-120	12V	120Ah	407×173×216	35kg

AGM BATTERY				
Model	Rated voltage	Capacity	Dimensions (mm)	Weight
 12TB 120	12V	120Ah	327×181×270	48kg
 6TB 200	6V	200Ah	260×181×275	39kg
 6TB 185	6V	185Ah	260×181×265	37kg
 DC85-12	12V	85Ah	260×169×211.2	25.1kg
 DC115-12	12V	115Ah	328×172×214	32.7kg
 HC110	12V	110Ah	330×173×214	34.6kg

AGM BATTERY				
Model	Rated voltage	Capacity	Dimensions (mm)	Weight
 DC55-12	12V	55Ah	229×138×208	17.6kg
 DC180-12	12V	180Ah	530×209×214	56.8kg
 TNE12-125	12V	100Ah	330×171×214	34kg
 TNE6-270	6V	270Ah	260×180×270	36kg
 TNEP6-400	6V	320Ah	295×178×345	51.5kg
 TNEP6-240	6V	200Ah	260×180×245	32kg

AGM BATTERY				
Model	Rated voltage	Capacity	Dimensions (mm)	Weight
 TNEP12-130	12V	120Ah	330×171×222	34kg
 TNEP6-290	6V	240Ah	260×180×270	36kg



SANYU

Hangzhou Sanyu Machinery Equipment Co., Ltd.

Address: Room 606, Building 8, No. 111 Tianhe Road, Donghu Street, Linping District,
Hangzhou, Zhejiang, P.R.C 311199
Mobile phone: +86 15268106207
E-Mail: Richard@cn-sanyu.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by Sanyu Machinery, any content may not be copied for any purpose without written permission.
2025-01