




TILT SENSORS

PARTS
MANUAL

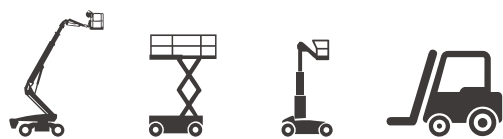

TILT SENSORS

	Height mm	Diameter mm	Detection mm	Switch type	Voltage V
	13,2	43	35 min per 2 mm	Level bubble	No voltage required
	14	100	1° per 5 mm	Level bubble	No voltage required
	115	97	2,5-4,5°	Normally open	7-48 DC
	115	96,5	4,5° 1,5 sec delay	Normally open	7-48 DC
	111	96,5	2° front-to-back axis 3° side to side	Normally closed	10-30 DC at 1,5 A or 10-60 DC at 0,5 A
	115	90	1,5°/3° 1,5 sec delay	Normally closed	7-48 DC
	115	89	2°/4° 1,5 sec delay	Normally closed	7-48 DC
	115	89	4,5° 1,5 sec delay	Normally open	7-48 DC
	115	89	2°/3° 1,5 sec delay	Normally closed	7-48 DC

TILT SENSORS

	Height mm	Diameter mm	Detection	Used on
	90	100	2	30E, 450A, 3369ELECTRIC, 30ELECTRIC
	130	97	2	TOUCAN870, TOUCAN800A, TOUCAN800, TOUCAN861, TOUCAN870
	114	97	3°	(N)30/35/40/45E, 450A/450AJ
	114	97	4.5°	3394RT, 260MRT
	16,9	96,7	0°/3°	SL153-12E, 67SL
	16,9	96,7	0°/3°	TOUCAN1210, TOUCAN1310, TOUCAN1100, TOUCAN1010, TOUCAN JUNIOR 6, TOUCAN861, TOUCAN910, TOUCAN JUNIOR 8, VM1931E, TOUCAN DUO, V1331E
	85	63	1,9°/1,9°	26MRT, 25RTS, 400RTS
	17,5	70	1,9°/1,9°	TOUCAN 8E, TOUCAN 10E

TILT SENSORS

	Height mm	Diameter mm	Detection	Used on
	58,5	85	1,9°/1,9°	1200SJP, 1250AJP, 1500SJ, 1100S
	28	49,5	2	1930ES
	45	79	2	9MP, 3264E2, 1532E2,
	28	49,5	2	1523E3 form serial n° 0200000000 to 0200999999, 3246E2, 1532E, 10VP, 1532E2
	29,5	49,5	2	1500SJ, 1850SJ, 1200SJP, 1100SB
	30	50	2	CM1432, 3246E2, 400RTS, 3369ELECTRIC, 1532E2
	28	50	2	740AJ, 800A/800AJ

TILT SENSORS

	Height mm	Diameter mm	Switch type	Voltage VDC	Detection	Used on
	113	96,7	Level sensor	7-48	1-10°	HA12IP, HA15IP
	113	96,7	Level sensor	7-48	1-10°	COMPACT12EN 280, HA15I, HA43E, COMPACT8W/COMPACT2247E, COMPACT10RTE/COMPACT2668L, COMPACT10N/COMPACT2632E, COMPACT10/COMPACT2747E, COMPACT12, COMPACT3374E, COMPACT8W, STAR11, STAR8, STAR10, HM10P, HA12I, H18SDX, H18SX/HS5388RT, COMPACT10DX, COMPACT12DX, COMPACT12DX, COMPACT3368RT, HA26PX, HA80RJT, HA12PX, COMPACT8W, COMPACT12
	113	96,7	Level sensor	7-48	1-2°	H12SD, HA12PX, HA15D, H21T, HA15X, HA16PX, HA18PX, HA16PXNT, HA18PXNT, HA20P, HA16P, HA18P, HA26PX, HA20PX, HA26P, HA16TPX, H12SX, H15SD, H23T, H25TP, HA32PX, HA260PX, H15SX, STAR6, HA12CJ, H21TX, HA16SPX, HA16X, STAR6, LPE/STAR6P
	113	96,7	Level sensor	7-48	2°	OPTIMUM8, OPTIMUM6
	113	96,7	Level sensor	7-48	2°	COMPACT10/12DX/3368RT, COMPACT8/10N/2032E/26
	18,5	100	Level sensor		3°	H12SX, H12SD, H18DX, H15SD, COMPACT8DX, COMPACT10DX, COMPACT12DX, H15SX, H18SX
	85	72	Level sensor + tilt detector	9-33	5° /5°	COMPACT10/12/3368, COMPACT10/12DX/3368RT, HTB180, H18SX, HS5388RT, H12SX, HS3388RT, COMPACT8DX/COMPACT2068RT

TILT SENSORS


- Diameter: 96,7 mm
- Height: 116,8 mm
- Voltage: 7-48 VDC
- Detection: 1-10°

Used on 702/7135 SJ60,
7127/7135, 7127/96250 SJ600
SERIE, COMPACTT3015/3219 SJJJ



- Diameter: 96,7 mm
- Height: 116,8 mm
- Voltage: 12-48 VDC
- Detection: 2,5-4,5°

Used on SJM SERIES,
9250, SJ9250, SJ8831/41E,
6826/6832RT, SJ8831/41,
7027/SJ-600 SERIE



- Diameter: 96,7 mm
- Height: 116,8 mm
- Voltage: 24 VDC
- Detection: 5°

Used on SJKB33/40, SJKB33N



- Length: 97 mm
- Height: 54,5 mm
- Detection: 1,5-3,5°

Used on SJ3215/3219,
SJ3220/4632,
SH7127/35-8243/8850

ANGLE SENSOR


- Length: 102 mm
- width: 37,5 mm
- Height: 32mm

Used on SJ9241/9250RT0,
SJ8831/8841RT, SJ9250RT
SJ8841RT, SJ9241/50

LEVEL SENSOR


- Diameter: 43 mm
- Height: 12,7 mm

Used on TV15/TV20/TV25, SR2584/SR3284/SR4084, SLH2584HD/SLH3284HD/SLH40

TILT SENSORS


- Diameter: 96,8 mm
- Height: 116,8 mm
- Voltage: 7-48 VDC
- Detection: 2°

Used on SL15, SL19, SL20



- Diameter: 96,8 mm
- Height: 116,8 mm
- Voltage: 7-48 VDC
- Detection: 2°

Used on SL19E, SL20, SL25



- Diameter: 84 mm
- Height: 60 mm
- Voltage: 24 V
- Detection: 3°

Used on A38E

LOAD CELL


- Length cable: 3000 mm
- Height: 145 mm
- Width: 25 mm
- Diameter holes: 11 mm

Used on AB80J-AB85(R)
J-A80J-A

ANGLE SENSORS


- Length: 103 mm
- With: 32 mm
- Height: 37,5 mm

Used on S1930E/S1932E,
S2646/S3246, SL26SL/SL30SL,
X26N

PROXIMITY SENSORS	
 ■ Length: 82 mm ■ With: 19 mm ■ Voltage: 250/300 V Used on X26N, M2032/2639-J, S1930E/S1932E	 ■ Length: 54 mm ■ With: 32 mm ■ Voltage: 100 V Used on S3370BE/S2770RT, SR2584/SR3284/SR4084, SLH284HD/SLH3284HD/SLH40, SR2770, SRT2670, SP17/SP18



SANYU

Hangzhou Sanyu Machinery Equipment Co., Ltd.

Address: Room 606, Building 8, No. 111 Tianhe Road, Donghu Street, Linping District,
Hangzhou, Zhejiang, P.R.C 311199
Mobile phone: +86 15268106207
E-Mail: Richard@cn-sanyu.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by Sanyu Machinery, any content may not be copied for any purpose without written permission.
2024-12